

# NOREFAST HS

## Premium glossy and fast drying isocyanate-free topcoat

**NoreFast HS** is an optimal high performance isocyanate-free topcoat for quick interval painting. It reduces the overall process time, without compromising on end-result. Thanks to its long pot-life it is also convenient to spray – ease to use.

### WHY TO CHOOSE NOREFAST HS?



#### FAST DRYING

Dry to handle in 1 hour.



#### SAFER CHOICE

Isocyanate-free product  
with 3 hours pot-life.



#### STYLISH END-RESULT

Glossy surface for  
demanding ACE & OEM  
applications.



#### WEATHER RESISTANT

Excellent colour and  
gloss retention.

**NOR**MAALI



+358 (0) 3 874 650



myynti@nor-maali.fi



Vanhatie 20  
15240 Lahti, Finland



Nor-maali.fi

# MAKES GLOSSY FINISH, FAST

Thanks to its innovative technology, NoreFast HS brings efficiency to your painting process. The hard and durable surface ensures an excellent protection against UV radiation. As a high solids isocyanate-free polyurethane coating, it is also a safer choice for the user.

## Superior glossy end-result really fast

Used as a topcoat, NoreFast HS offers a stylish, glossy finish. This hard-surfaced product is dry to handle after one hour and thus enables fast painting process with selected primers.


## User-friendly option

Spraying properties of NoreFast HS are unique. The spray fan is really uniform and forming of dry spray is minimal. Painted surface is smooth and stylish looking. NoreFast HS has a long 3 hours pot-life, which offers flexibility for the painting process.

## Safer and more environmentally friendly choice

NoreFast HS doesn't contain isocyanate, making it a safer choice for the user. As a high solids coating (77 vol%) it is a safer option for both the user and the environment.

Updated Technical Data Sheet (TDS) and Safety Data Sheet (SDS) and our general conditions of sales are available at [www.nor-maali.fi](http://www.nor-maali.fi). In case of differences in information: the order of priority of information is TDS and SDS over any other information.

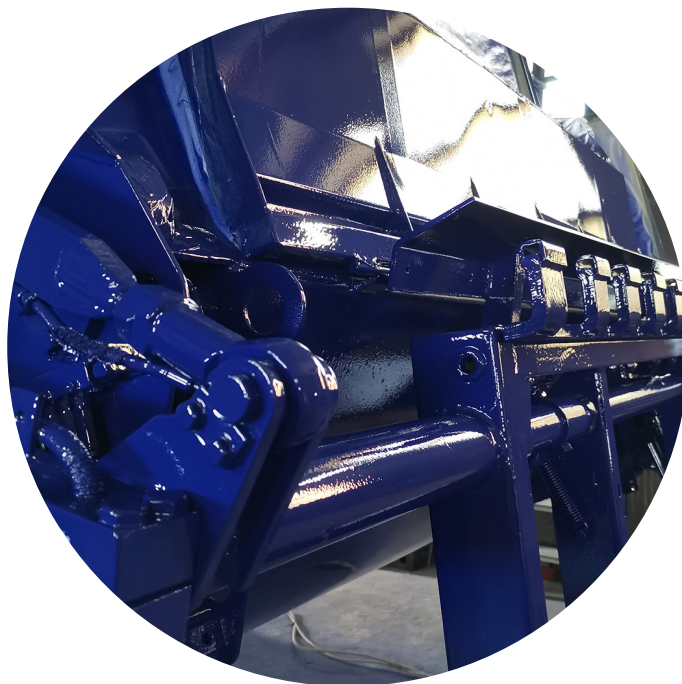

## NOREFAST HS

### MACHINERY AND EQUIPMENT

#### EXTREMELY FAST DRYING ISOCYANATE FREE TOPCOAT

VOLUME SOLIDS	77 %
VOC	195 G/L
MIXING RATIO	10:1
POT-LIFE	3 H
COLOURS	RAL, NCS S, KY AND SSG
FINISH	GLOSSY
<b>CORROSIVITY CATEGORY</b>	
TOPCOAT	C2 – C5

**More information in the TDS**

**NOR**MAALI

#### ESTONIA

Oü Nor-Maali  
Vana-Narva mnt 5c,  
Maardu  
74114 Estonia

Tel. +372 600 3948  
[tellimus@nor-maali.ee](mailto:tellimus@nor-maali.ee)

#### SLOVAKIA

Nor-Maali s.r.o.  
Senecká cesta 18  
821 04 Bratislava

Tel. +421 903 210 259  
[sales@nor-maali.sk](mailto:sales@nor-maali.sk)

#### SWEDEN

Nor-Maali Group AB  
Varggatan 23  
749 40 Enköping

Tel. +46 70 537 6404  
Tel. +46 70 537 6414  
[forsaljning@normaali.se](mailto:forsaljning@normaali.se)