

WATER-BORNE SEMI GLOSS ACRYLIC COATING

DIRECT-TO-METAL

NORECRYL AQUA DTM

Weather-resistant Norecryn Aqua DTM for anticorrosion painting - without isocyanate

When corrosion and weather resistance is required, **Norecryn Aqua DTM** is the right choice. This two-component water-borne acrylic coating combines the best properties of epoxies and polyurethane coatings - without isocyanate.

WHY TO CHOOSE NORECRYL AQUA DTM?



ISOCYANATE-FREE

Safer choice for the user.



GREENER CHOICE

Water-borne option to enhance work safety.



DIRECT-TO-METAL COATING

Corrosion resistance with one layer of paint.



8 HOURS POT-LIFE

Easier painting process, less waste.

NORMAALI



+358 (0) 3 874 650



sales@nor-maali.fi



Vanhatie 20
15240 Lahti, Finland



Nor-maali.fi

WEATHER-RESISTANT CORROSION PRO- TECTION WITHOUT ISOCYANATE

Norecyl Aqua DTM combines the best features of epoxy and polyurethane coatings: corrosion and weather resistance, and a smooth finish.

Norecyl Aqua DTM is designed as a direct-to-metal (DTM) coating for corrosion classes C2-C3. The product reaches corrosion class C3-M with a 120 µm DFT, making it an excellent choice for painting machinery and equipment and general steel structures.


Safer choice for industrial painting

Norecyl Aqua DTM is designed for safer painting with technical features in mind. The product does not contain isocyanate, which makes it a safer choice for the user. The low VOC content also makes Norecyl Aqua DTM a safer choice for both the user and the environment.

NISO single-coat system with a long pot-life

The isocyanate-free Norecyl Aqua DTM offers a cost-effective alternative for weather-resistant corrosion protection. The paint has 8 hours pot-life, which is really long compared to many polyurethane coatings. It generates less paint waste and allows for completion with a single spray.

Updated Technical Data Sheet (TDS) and Safety Data Sheet (SDS) and our general conditions of sales are available at www.nor-maali.fi. In case of differences in information: the order of priority of information is TDS and SDS over any other information.

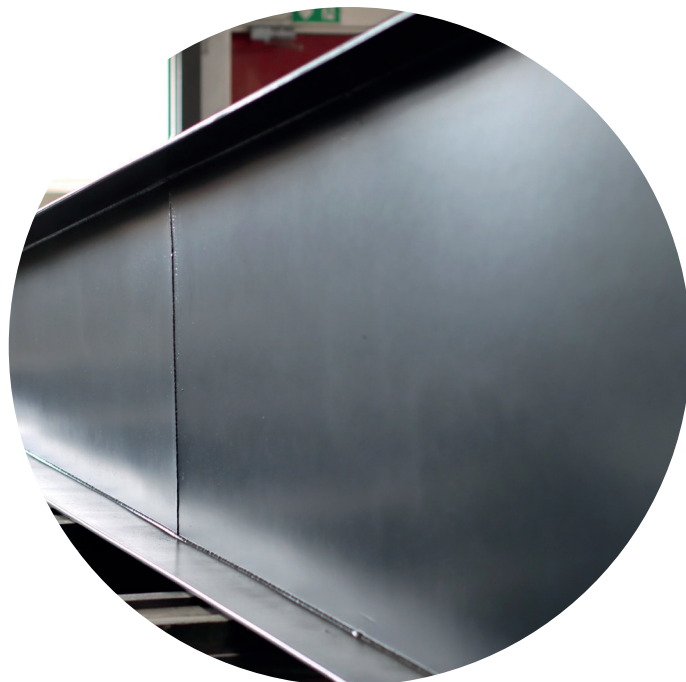

NORECRYL AQUA DTM

GENERAL STEEL STRUCTURES MACHINERY AND EQUIPMENT

ISOCYANATE-FREE DIRECT-TO-METAL COATING

VOLUME SOLIDS	50 %
VOC	57 G/L
MIXING RATIO	4:1
POT-LIFE	8 H
COLOURS	RAL AND NCS S
FINISH	SEMI GLOSS
CORROSIVITY CATEGORY	
SINGLE-COAT	C2 – C3
DURABILITY RANGE	120 µm – C3 M

More information in the TDS



ESTONIA

Oü Nor-Maali
Vana-Narva mnt 5c,
Maardu
74114 Estonia

Tel. +372 600 3948
tellimus@nor-maali.ee

SLOVAKIA

Nor-Maali s.r.o.
Senecká cesta 18
821 04 Bratislava

Tel. +421 903 210 259
sales@nor-maali.sk

SWEDEN

Nor-Maali Group AB
Varggatan 23
749 40 Enköping

Tel. +46 70 537 6404
Tel. +46 70 537 6414
forsaljning@normaali.se